

# MegaLine<sup>®</sup> Pro 700 Dca

## KS-02YSCH 4 x 2 x AWG 23/1 PIMF


 Category 7 **S<sub>3</sub> P<sub>3</sub> A<sub>3</sub> C<sub>4</sub> E<sub>4</sub>**


Illustration similar

### Construction


Conductor	bare copper wire, 0.56 mm Ø	Twisting	PiMF to cable core
Insulation	cellular-PE, Core-Ø: nominal value 1.30 mm	Overall screen	tinned copper wire braid
Colour code	WH/BU, WH/OG, WH/GN, WH/BN	Outer sheath	Halogen free flame retardant compound (FRNC), UV resistant
Element	cores to pair	Colour	Colza yellow
Pair shielding	aluminium-bonded polyester tape		

### Cable marking

KERPEN DATACOM Made in Germany MegaLine PRO 700 4P LSOH Cat.7 10G 4PPoE Dca DoP: CDESK0000108 \$BA-Nr.\$ \$m-sign.\$


### Fire Behaviour

Fire class / DoP	Dca -s1a,d1,a1 / CDESK0000108
Fire performance	EN 50575 / EN 50399
Flame retardancy	IEC 60332-3-24 / EN 50266-2-4
Halogen-free	IEC 60754-1, IEC 60754-2
Acidity	IEC 60754-2
Smoke density	IEC 61034-2
Fire load (approx.)	0.24 MJ/m

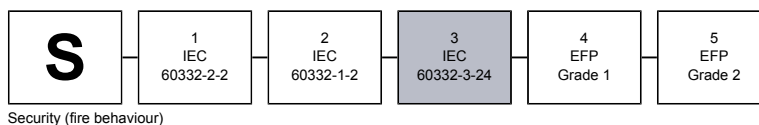

Security (fire behaviour)


### Performance

 better than Category 7 acc. to EN 50288 and IEC 61156 good NEXT, good screen properties (pair- and overall screen), low Skew  
 Bandwidth (max.) 700 MHz


Performance (class, bandwidth)

### Applications


Installation cable for generic cabling systems acc. to ISO/IEC 11801 and EN 50173 (3rd edition). Ideal for all applications of class D up to F up to 10 GbE acc. to IEEE 802.3an, Cable sharing, VoIP, PoE/PoE+/4PPoE up to 90W.



Application (Ethernet, TV)

### Mechanical characteristics (cable)


Bending radius (static) (min.)	4x outer-Ø
Bending radius (dynamic) (min.)	8x outer-Ø
Tensile strength	110 N
Crush resistance (long term)	1000 N/100mm
Impact strength (quantity of impacts)	10



Construction (conductor size, tensile strength)

### Electromagnetic behaviour

Coupling resistance @ 10 MHz (nom.)	25 mΩ/m
Screen attenuation (nom.)	60 dB
Coupling attenuation (nom.)	80 dB
Segregation class according to EN 50174-2	c



EMC (coupling attenuation)

# MegaLine<sup>®</sup> Pro 700 Dca

## KS-02YSCH 4 x 2 x AWG 23/1 PIMF

 Category 7 **S<sub>3</sub> P<sub>3</sub> A<sub>3</sub> C<sub>4</sub> E<sub>4</sub>**
**Electrical properties at 20°C**

DC resistance (max.)	82 Ω/km
Insulation resistance (min.)	5 GΩ x km
Operating capacity (approx.)	42 pF/m
Capacitive coupling (e) (approx.)	1100 pF/km
Signal velocity (approx.)	0.8 x c
Phase delay	420 ns/100m
Skew @ 100 MHz (approx.)	7 ns/100m
Characteristic impedance @ 100 MHz	100 +/- 5 Ω
Test voltage	1000 V
Operating voltage (max.)	125 V

**Thermal characteristics (cable)**

Transport / storage	-20 °C up to +60 °C
During installation	0 °C up to +50 °C
After installation	-20 °C up to +60 °C

**Chemical characteristics**

Conform to RoHS and REACH, Free of hazardous substances acc. to RoHS 2011/65/EU

Frequenz MHz	Attenuation dB/100m		NEXT dB		PSNEXT dB		ACR-N dB@100m		PSACR-N dB@100m		ACR-F dB@100m		PSACR-F dB@100m		RL dB	
	typ.	Cat.7 max.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*
1	1,9	2,0	87	80	84	77	85	78,0	82	75,0	85	80	82	77	28	-
10	5,4	5,7	85	80	82	77	80	74,3	77	71,3	80	74	77	71	27	25,0
100	18,1	18,5	75	72	72	69	57	53,5	54	50,5	78	54	75	51	26	20,1
200	26,4	26,8	69	68	66	65	43	41,2	40	38,2	75	48	72	45	20	18,0
250	29,9	30,2	67	66	64	63	37	35,8	34	32,8	73	46	70	43	19	17,3
300	31,9	33,3	66	65	63	62	34	31,7	31	28,7	72	44	69	41	19	17,3
450	38,9	41,6	64	63	61	60	25	21,4	22	18,4	65	41	62	38	19	17,3
500	41,2	44,1	63	62	60	59	22	17,9	19	14,9	63	40	60	37	19	17,3
600	46,2	48,9	62	61	59	58	16	12,1	13	9,1	60	38	57	35	19	17,3
700	51,4	-	58	-	55	-	7	-	4	-	56	-	53	-	18	-

\* IEC 61156-5 (2020)

**Standards, certificates and approvals**

Conformity

 to CPR (EU/305/2011)  
 acc. to LVD (2014/35/EU)

Link Performance

 KERPEN DATACOM MegaLine<sup>®</sup> systems and further commercial plug-in connector

Inspection certificate

acc. to DIN 55350-18-4.2.1 bzw. EN 10204

Part number	Weight	Copper weight	Outer Ø approx.	PU (pieces)	Colour
KD7D66D3Y010000	50 kg/km	26 kg/km	6.8 mm	1	Colza yellow